


Rigging screw toggle/terminal UNF – open body

Polished stainless steel – AISI 316 and chromed bronze body

Technical drawing

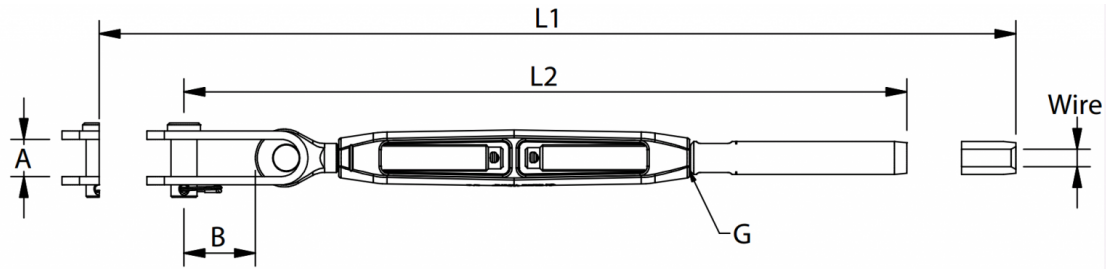

Datatable

RIGGING SCREW TOGGLE/TERMINAL UNF														
F	R	W	M	ART. NO.	G	WIRE	PIN	A	B	L1	L2	BL/KG	KG/100	PACK
			•	330306A5G	1/4"	3	5	7	11,5	250	188	1000	10,2	10
			•	333206A5G	1/4"	1/8"	5	7	11,5	250	188	1000	10,2	10
			•	330406A5G	1/4"	4 - 5/32"	5	7	11,5	260	198	1000	10,8	10
			•	330406A6G	1/4"	4 - 5/32"	6,35	10	14	269	207	1300	12,2	10
			•	330506A6G	1/4"	5 - 3/16"	6,35	10	14	273	211	1300	13	10
			•	330606A6G	1/4"	6	6,35	10	14	265	203	1300	12,4	10
			•	330306A	1/4"	3	6,35	8	17	255	193	1300	12,7	10
			•	333206A	1/4"	1/8"	6,35	8	17	255	193	1300	12,7	10
			•	330406A	1/4"	4 - 5/32"	6,35	8	17	265	203	1300	13	10
			•	330408A	5/16"	4 - 5/32"	8	10	20	304	228	1700	17,4	10
			•	330508A	5/16"	5 - 3/16"	8	10	20	310	234	2200	18,5	10
			•	330510A	3/8"	5 - 3/16"	9,5	12	26	349	265	2400	28,2	5
			•	335510A	3/8"	7/32"	9,5	12	26	357	273	3400	29	5
			•	330610A	3/8"	6	9,5	12	26	364	280	3400	32,5	5
			•	330611AX	7/16"	6	11	15	28	397	307	4600	47,5	5
			•	330711AX	7/16"	7 - 9/32"	11	15	28	408	318	4600	47,5	5
			•	330612AX	1/2"	6	12,7	18	35	425	319	5400	74	5
			•	336312AX	1/2"	1/4"	12,7	18	35	425	319	5200	75	5
			•	330712AX	1/2"	7 - 9/32"	12,7	18	35	433	327	6100	77	5
			•	330812AX	1/2"	8 - 5/16"	12,7	18	35	448	342	6100	82	5
•				330812AXN	1/2"	8	12,7	18	35	459	367	6100	79,6	5
•				330816AXN	5/8"	8	16	20	40	549	439	8000		BULK
			•	330816AX	5/8"	8 - 5/16"	16	20	41	536	404	8700	126	BULK
			•	331016AX	5/8"	10	16	20	41	545	413	9700	135	BULK

RIGGING SCREW TOGGLE/TERMINAL UNF														
			•	339520AX	3/4"	3/8"	19	24	45	625	465	10200	190	BULK
			•	331020AX	3/4"	10	19	24	45	625	465	9700	190	BULK
			•	331220AX	3/4"	12	19	24	45	640	480	11400	200	BULK
			•	331220AXX*	3/4"	12	19	24	45	660	500	14000	200	BULK
			•	331320AX*	3/4"	1/2"	19	24	45	661	501	12900	202	BULK
			•	331222AX*	7/8"	12	22	26	49	786	592	14000	311	BULK
			•	331422AX	7/8"	14	22	26	49	794	600	15900	309	BULK
			•	331425AX	1"	14	25,4	29	59	932	692	15900	512	BULK
			•	331625AX	1"	16 - 5/8"	25,4	29	59	940	700	19400	505	BULK
			•	331927AX	1 1/8"	19 - 3/4"	28	34	62	1034	790	27600	857,9	BULK
			•	332230AX	1 1/4"	22 - 7/8"	32	40	69	1153	877	34600	1186,5	BULK
			•	332636AX	1 3/8"	26 - 1"	35	44	81	1296	990	42400	1613,9	BULK
			•	332842A	1 5/8"	28 - 1 1/8"	40	48	99	1554	1178	59700	2461,3	BULK

*Terminal OD. = 21,4

Note: All break loads are determined by clevis pin and thread

Please note:

Body chromed according to DS/EN ISO 1456 class 4 with one layer of nickel thickness minimum 0,025 mm and one layer of chrome thickness minimum 0,003 mm. Bright finish.