


Thread forks welded UNF

Polished stainless steel – AISI 316

Technical drawing

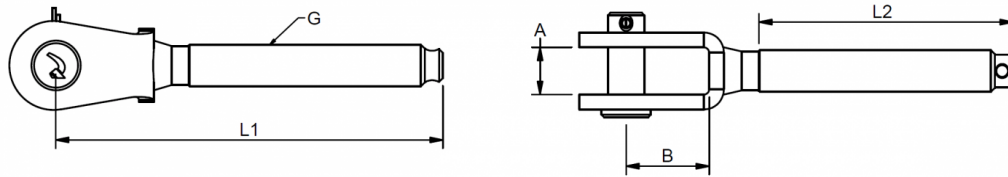

Datatable

WELDED THREAD FORKS UNF													
F	R	W	M	ART. NO. RIGHT	ART. NO. LEFT	G	PIN	A	B	L1	L2	BL/KG	KG/100
			•	021306AB	031306AB	1/4"	6,35	9,5	13	68	47	1300	2,3
			•	021308AB	031308AB	5/16"	8	11	15	81	57	2200	3,9
			•	021310AB	031310AB	3/8"	9,5	12	19	94	63	3400	6,9
			•	021311AB	031311AB	7/16"	11	12	23	104	80	4600	10
			•	021312AB	031312AB	1/2"	12,7	14	25	119	80	6100	17
			•	021316AB	031316AB	5/8"	14	18	33	151	100	9900	35,2
			•	021316AXB	031316AXB	5/8"	16	18	33	151	100	9900	37,3
			•	021320AB	031320AB	3/4"	19	24	48	191	119	14400	71,9
			•	021322AB	031322AB	7/8"	22	30	56	224,5	140	19600	120,1
			•	021325AB	031325AB	1"	25,4	30	62	258	170	21400	180

Note: All break loads are determined by clevis pin and thread

The user is responsible for choosing the proper cable diameter and correct assembly

